


Product Information

# In-line Fitting EA1630 / EA2630



Dimensions

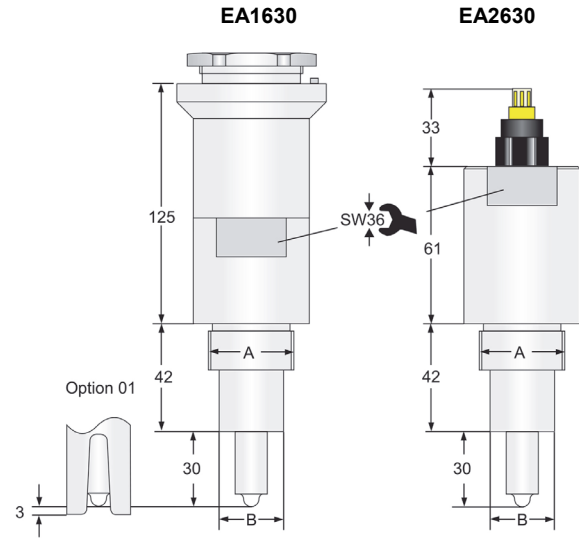

Tip protection

Process connection

A	B
G ¼ A	Ø23.5
G 1 A	Ø25

Characteristics

Compact fitting with Whitworth process connection acc. to DIN ISO 228.

This In-line fitting has been designed for electrochemical cells like pH/ORP-, conductivity-cells with PG13.5 process connection. It protects the sensor and ensures a proper measurement. The fitting is conceived for the application in the chemical industry.

Technical data

Process connection : pipe thread acc. to DIN ISO 228  
 Process material : PVDF  
 Operating temperature : -10..+120 °C  
 steam sterilization 140 °C < 1 h  
 Process pressure : max. 16 bar

Ordering code

EA  1. -  2. -  3. -  4.

<b>1. Model</b>	
1630	head mounting at UNICON-pH
2630	field mounting
<b>2. Process connection (A)</b>	
G ¼ A	
G 1 A	
<b>3. Sensor type</b>	
0	standard pH / ORP combined-electrodes
<b>4. Options</b>	
00	without option
01	with integrated tip protection (only for pH and ORP combined-electrodes)