


Produktinformation

KCI-Reservoir NFG70

Dimensions

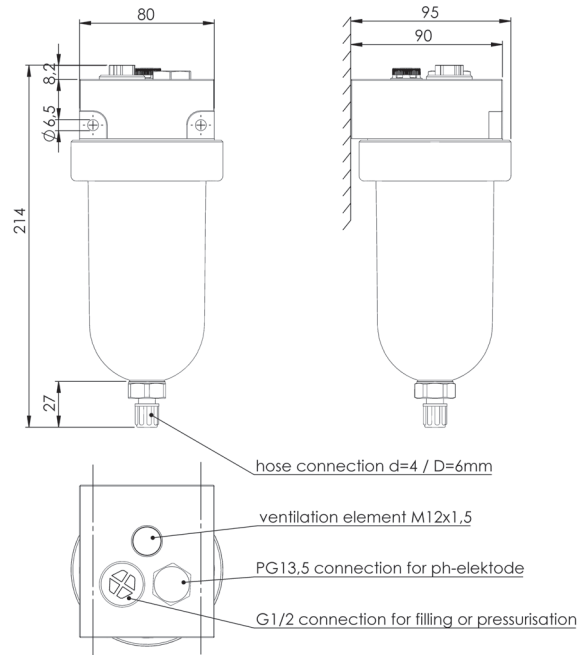

- Top side G1/2 and PG13, 5 connection threads for automated level monitoring, monitoring measurement or filling
- Ventilation element, M12x1,5 thread
- Hose connection 4/6mm for liquid KCl
- Vessel suitable for wall mounting
- Stainless steel fixing screws included
- Stable, durable construction made of polycarbonate PC (container) and PVC-U (connector block)

Characteristics

The KCI-Reservoir is fitted with a G1/2 thread (level monitoring or pressurization the vessel) and a PG13,5 thread (for filling the vessel, for example). For both threads, sealing plugs are included to seal unneeded holes. A third drilling is fitted with a thread M12x1,5mm, in which a ventilation element is screwed in. This element can be removed when the vessel is pressurized.

Technical data

- Container : PC Polycarbonate, crystal clear, colorless, 250ml
- Connector block : PVC-U with mounting holes for 6 mm Screw
- O-Ring seals : EPDM
- Hose connection : PP Polypropylen, Da/di 6/4mm
- Operating temperature : 0..60 °C
- Operating pressure : 6 bar at 20°C, 0,2 bar at 60°C
- Pressure port : 1x female thread G1/2 (with sealing plug)
- Sensor connection : 1x female thread PG13,5 (with sealing plug)
- Ventilation element : 1x female thread M12x1,5 mm

Ordering code

KCI reservoir: NFG

1.	2.	3.	4.	5.	6.
70	1	1	1	1	

1.	Type	70 70 KCL reservoir D=70mm, 250ml
2.	Hose connection	1 Hose connection PP, for hose D/d-6/4mm
3.	Process connection	1 1x PG 13,5 / 1x G1/2 / 1x M12x1,5
4.	Material connector block	1 PVC-U
5.	Material container	1 PC Polycarbonate, crystal clear, colorless
6.	Options	00 without option