GHM GROUP - Martens | GHM Messtechnik GmbH
Kiebitzhörn 18 | 22885 Barsbüttel | GERMANY
Phone +49 40 67073-0 | Fax +49 40 67073-288
www.ghm-group.de | info@ghm-group.de

Conductivity Cell LF2653HT

Characteristics

- **2-electrode conductive high temperature cell for pure- and ultra-pure water with pipe thread acc. to DIN ISO 228**
- **Measuring range 0..0.5 µS/cm up to 0..50 µS/cm**

Technical data

Cell constant	:	C = 0.1 exact cell constant labeled on the type plate
Operating temperature	:	0..200 °C
Process pressure	:	max. 20 bar
Process material	:	stainless steel 1.4404 (316L), ceramic, Kalrez
Electrical connection		
Field mounting	:	8 pole round connector plug M12x1, IP67
Material	:	brass nickel plated
Temperature measurement	:	integrated Pt1000 sensor DIN IEC751, Class A

Dimensions

Field mounting

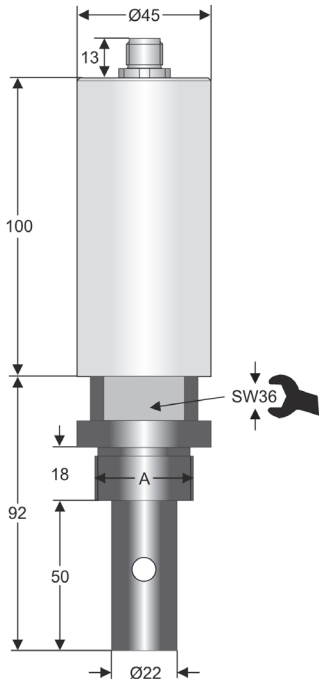

Ordering code

LF [1.] - C0.1 - [2.] - [3.]

1.	**Model**	
	2653HT	field mounting
2.	**Process connection**	
	G ¾ A	
	G 1 A	
	G 1 ¼ A	
3.	**Options**	
	00	without option
	03	8 pole round connector plug SS-type

Connection diagram see page Fehler: Verweis nicht gefunden

Additional accessories see page Fehler: Verweis nicht gefunden

PRC Technologies Corp., Ltd. ลาดพร้าว 101 กรุงเทพ 10240
โทรศัพท์ : 02 530 1714, 02 932 1711 มือถือ : 086 360 8600
อีเมล : contact@prctech.net LINE ID1 : prctec-info, LINE ID2 : @prctec