


Produktinformation

Dimensions

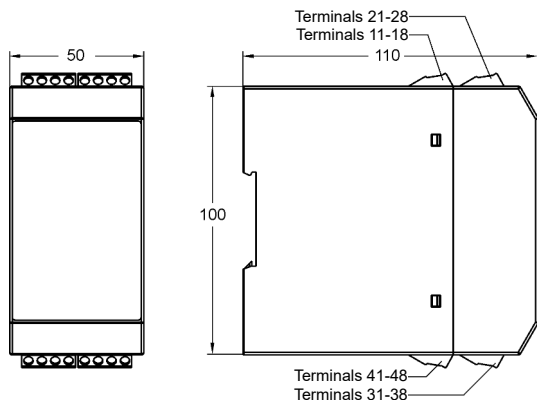

Ordering code

PMT50Ex - 1. - 2. - 3. - 4. - 5. - 6.

1. Model/input	
1	Standard signals 0/4..20 mA, 0/2..10 V DC
	Intrinsically safe EX II (1) G [Ex ia] IIC/IIB EX II (1) D [Ex iaD]
2. Analog output	
AO	0/4..20 mA, 0/2..10 V DC, isolated
3. Alarm outputs	
00	not installed
2R	2 relay outputs, A1, A2 SPDT
4. BUS configuration	
00	not installed
5. Supply voltage	
0	230 V AC, ± 10 % 50-60 Hz
1	115 V AC, ± 10 % 50-60 Hz
5	24 V DC, ± 15 %
6. Options	
00	without option

Connection diagram

