



ULTRA- **SIDEWINDER**[®] CABLE PROTECTION SYSTEMS

PROTECT CORDS AND CABLES AND AVOID DANGEROUS TRIPPING HAZARDS

Articulating pieces offer flexible design - curves, corners and s-curves are easily made while maintaining a completely flat profile.

Modular design makes it easy to reconfigure, repair, and replace targeted segments, even while the cable remains connected.

Simple installation - **no tools** required.

Fully **customizable** length

FEATURES & BENEFITS

ARTICULATION

The Ultra-Sidewinder's design articulates left and right—allowing the system to turn corners and adapt to the layout of the room, while maintaining full protection for the cables and trip protection for pedestrians. This flexible design allows curves, corners and s-curves to be easily made while maintaining a completely flat profile.

U.S. Patent No. 8,168,888

Video available at www.adamhall.com

Ultra-Sidewinder®




Also available in black & brown.



Coil for storage or easy portability and transport.

① Extension Cord
3/8" (9.5 mm)

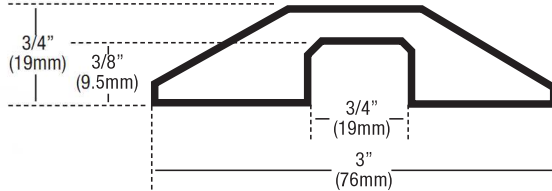

Ultra-Sidewinder®

Load Capacity: 2,000 lbs./in² (140.6 kg/cm²)
Load Capacity per axle: 32,000 lbs. (14,515 kg.)

3-Foot System with Endcaps
40" x 3" x 3/4" (1,067 mm x 76 mm x 19 mm)
Weight: 1.5 lbs. (0.7 kg)
Internal channel opening - 3/4"W x 3/8"H (19mm x 9.5mm)

Black & Yellow	Black	Brown
851800	851802	851804

1-Foot Extension System
12" x 3" x 3/4" (394 mm x 76 mm x 19 mm)
Weight: 0.5 lbs. (0.2 kg)
Internal channel opening - 3/4"W x 3/8"H (19mm x 9.5mm)


Black & Yellow	Black	Brown
851801	851803	851805

24-Foot Bulk Box (includes two endcaps)
294" x 3" x 3/4" (7,468 mm x 76 mm x 19 mm)
Weight: 10.0 lbs. (4.5 kg)
Internal channel opening - 3/4"W x 3/8"H (19mm x 9.5mm)

Black & Yellow
851820

DRIVE OVER CAPABILITY

Support ribs under the Ultra-Sidewinder provide outstanding weight bearing capacity allowing for vehicles to safely drive over cords, hoses, and cables.*



*For use with vehicles with pneumatic tires only. Steel or solid rubber tires may cause damage.

LIGHT WEIGHT

ABS plastic and superior design allow the Ultra-Sidewinder to be light weight. Saves on shipping and makes handling, assembly, and installation easier on personnel.



REGULATION

Flame classification UL94 HB (harmonized with IEC 60695-11-10)



Video available at www.adamhall.com